

# GSM OutdoorAlert 2

A compact, IP rated, self contained battery powered SMS alerting device with 2x volt free inputs triggers for customisable alarm messages.

## Overview

### Outdoor SMS Alert device with 2 digital inputs


- Battery powered - up to 1 year
- External power option
- N/O or N/C contacts
- Up to 5 SMS alert message recipients
- External power fail alert/restore
- Input delay
- Scheduled test message
- Configuration by SMS
- Discreet



## Applications

Water processing • Air Handling • Remote Buildings  
Pumping Stations • Barrier security • Power Systems  
Tamper Alarms • Building Sites etc...

## Example Messages

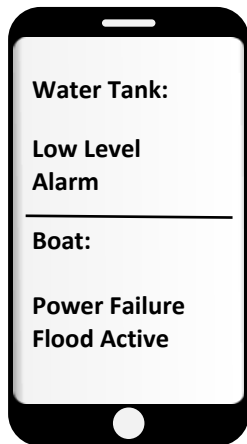

## Specification

GSM Modem Frequency	850/900/1800/1900 MHz
Power requirements	Battery (2x CR123) - up to 1 year or external 12v DC supply (min 500mA)
Inputs channels	2 x digital (dry volt-free contacts)
Input configuration	N/C or N/O
Input events (alerts)	Customisable SMS or Call
Dimensions	162 x 82 x 55 mm IP66
Operating Temperature	-10...+50°C
Alarm features	Alarm repeat, Alarm delay, Inactive Time, Scheduled Arm/Disarm
Users	5
Configuration	SMS
Antenna	Built-in

## Ordering

Type	Description	Part Number	Price (ex VAT)
GSM OutdoorAlert 2	GSM Outdoor Alert 2 with built-in antenna, UK unregistered SIM card User Guide & Batteries	SMM-OUTALERT2	Please contact
UK Plug-in power supply	UK 3 pin plug in power supply for optional external power for GSM OutdoorAlert 2	PS001	SeNdTech
Spare Batteries	Lithium CR123 - Pair	SMM-OUT2BATT	For prices

This is one of a number of mobile monitoring and control products we supply and support. If you have any questions or wish to discuss your application please contact us on the number below.

